




Oil Sight Glass & Level Monitor

- ① 2 Micron Breather
- ② Length
- ③ Upper Oil Limit O-ring
- ④ Lower Oil Limit O-ring
- ⑤ 3/8" NPT Port
(Dual ports available)
- ⑥ Reservoir Debris
- ⑦ Accumulated water
to be discharged
- ⑧ Drain Valve

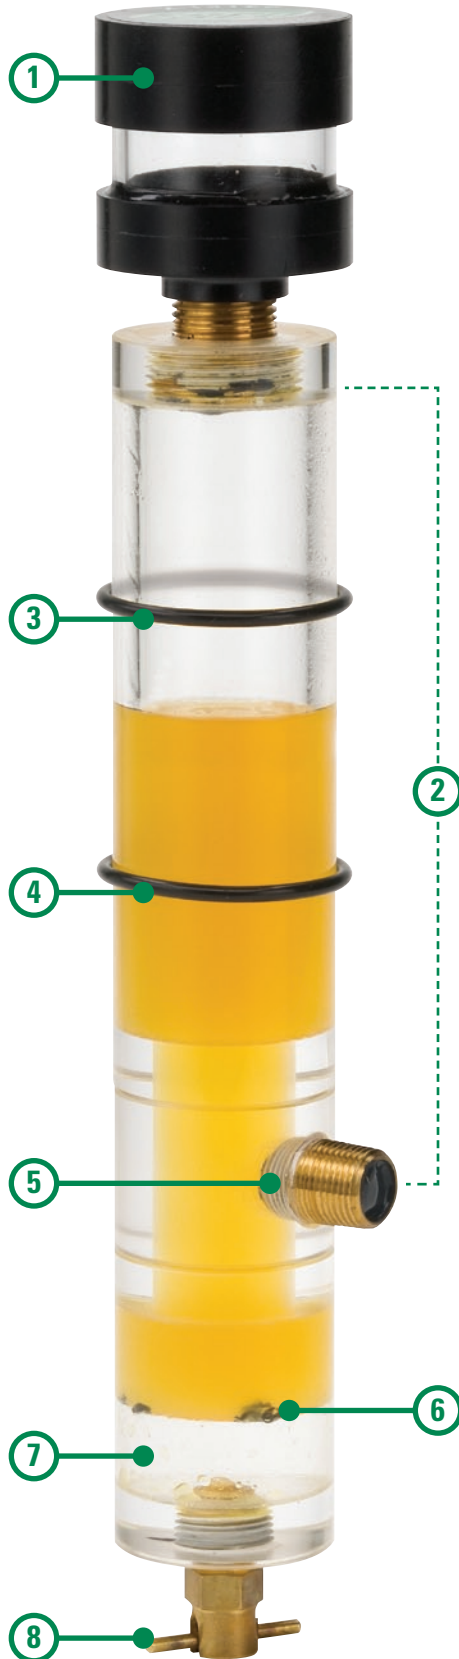

The Esco Oil Sight Glass & Level Monitor allows the user to view the oil color, clarity, and accumulation of water or other contaminants, as well as the level of the oil in the reservoir. The OSGL comes in versions of 3" to 12" to correspond to the distance from the oil reservoir access port and the maximum height the oil will reach. A dual port version is available with a second 3/8" NPT port opposite the installation nipple to allow the installation of a sample port.

5325 Glenmont, Suite C
Houston, Texas 77081
713.661.5514 Phone
800.966.5514
713.666.5877 Fax
info@esco-inc.com
www.esco-inc.com

Oil Sight Glass & Level Monitor	
Outside Diameter	1.75"
Length	3" – 12", custom available
Maximum PSI	225
Operating Temperature	-40°F to 165°F -40°C to 74°C
Specifications	<ul style="list-style-type: none">• Commercial grade acrylic• Brass drain valve• 3/8" NPT brass nipples



Oil Sight Glass & Level Monitor

FIELD APPLICATIONS



Wastewater Treatment Plant



Pulp & Paper Mill



Chemical Processing Plant

**MEASURING
DIAGRAM**

**FPO
(to come)**