

Maintain the proper level of oil in your equipment with this self-leveling, constant level oiler.



APPLICATIONS

- Bearing housings
- Gearboxes
- Sleeve bearings
- Pump housings
- Ventilating fans and blowers
- Any application requiring a constant liquid level

BENEFITS


- 360 View of oil quality and level
- Improve machine reliablity
- Prevent machine downtime
- Avoid costly repairs

PRODUCT OVERVIEW

The LeveLock constant level oiler is installed at the sight window that comes standard on most equipment. The 3-D Viewport allows for immediate visual indication of lubricant level and when the lubrication falls below the desired oil level, the reserve reservoir bottle on top self-levels, refilling the reservoir to its appropriate level. Machines often fail due to too little or too much lubricant – the LeveLock locks your oil level in place and provides you and your maintenance team peace of mind.





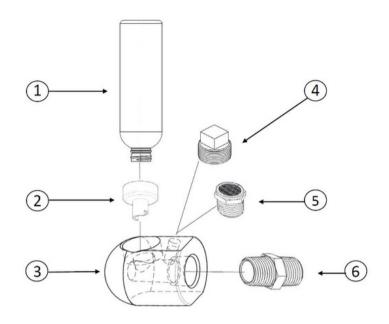

LEVELOCK KIT - PART NO: ESCOLL750 INCLUDES:

- 1 8oz Natural HDPE Plastic Bullet Bottle, 24mm
- 2- Esco Levelock Brass Tip
- 3-Esco LeveLock Acrylic Chamber 3/4" 6 Brass Hex Nipple 3/4" NPT
- 4 Brass Square Head Pluch 1/8" NPT
- 5 40 Micron Sintered Bronze Breather Vent - 1/8" NPT

OPERATING RANGE

- -40°F to 200°F (-40° to 93°C)
- 65 psi (4.48 bar)

VISUAL OIL ANALYSIS

The **LeveLock** is brought to you by the original creators of the Visual Oil Inspection product line, including the: 3-D BullsEye, Oil Sight Glass, Oil Level Indicator, and the Oil Sight Glass & Level Monitor.

